
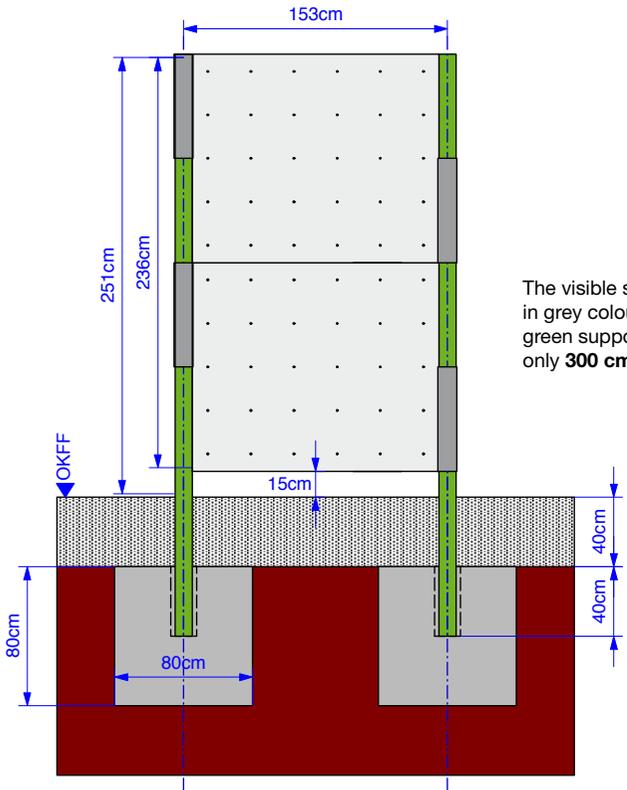


On site foundations 80 x 80 x 80 cm with internal slot for the pillars $\text{Ø} 15 \text{ cm} \times L = 40 \text{ cm}$ in the foundations. Therefore please use the pre-supplied plastic hollow sleeve ($\text{Ø} 15 \text{ cm}$). Concrete which is at least with C20/25 classification is to be used.
Do not use the supplied steel tube.
For the foundations distance always use slot middle shaft – slot middle shaft 153 cm.

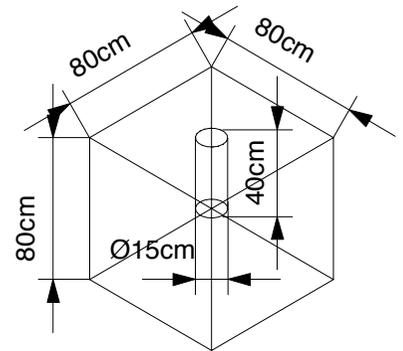

The visible sleeves are shown in grey colour. The hidden, green supporting tubes are only 300 cm long!

Fall protection: sand or bark mulch

Bouldering Wall exemplary Type I		Article Number	
		Scale	1 : 50
		Date	15. April 2010
		Name	